

6Ch 7inch HD 1080P Rearview Mirror Monitor



Operating Instructions


Before operating this set, please read these instructions completely

Monitor button instruction



- 1.Remote Window
- 2.Analog increase
- 3.Menu
- 4.Analog decrease/Ok key
- 5.Channel Switch/Move down in the menu
- 6.Power on/off

Wire Diagram

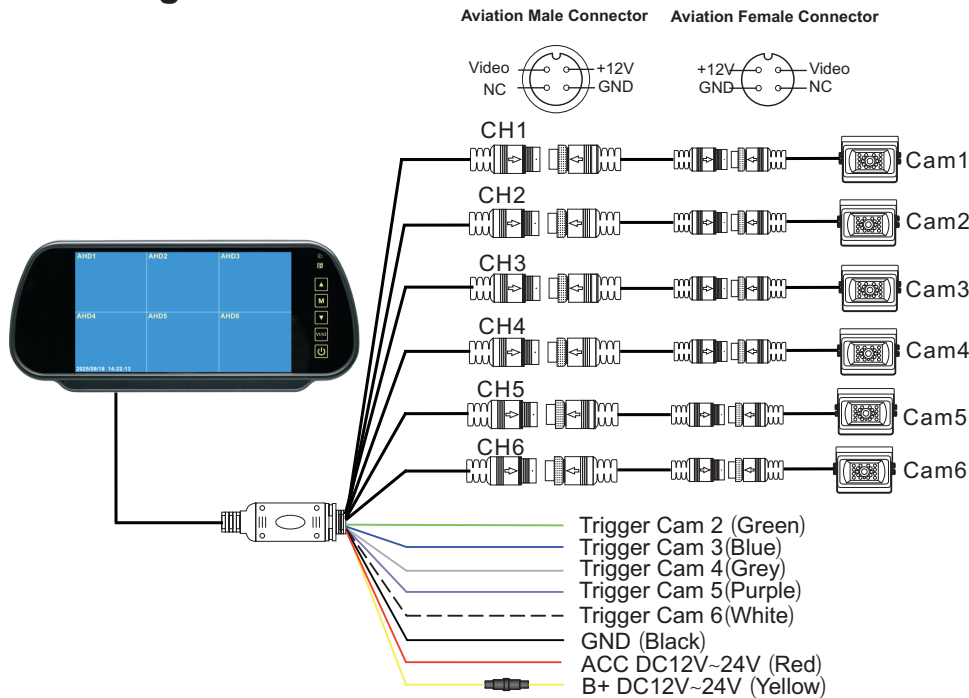


Specification

6ch 7inch IPS HD 1080P Rearview Mirror Monitor

- Display: 7inch IPS HD 1080P
- Power consumption: About 12W
- Power supply: DC 12-24V
- System: NTSC/PAL
- Brightness:500cd/m²,1000cd/m² optional
- Resolution: 1024*RGB*600
- Display ratio:16:9
- Video Mode:Full /2/3/4/5/6 image
- Viewing angle: L/R 85/85 U/D 85/85
- Video input: 6 signal input,5 trigger wires
- Support Video recording,Up to 256GB SD card
- Video signal: 720P/960P/1080P/CVBS Hybrid
- No signal shows blue screen
- Working temperature:-30°C~70°C,RH 95% MAX

Remote Control Operation

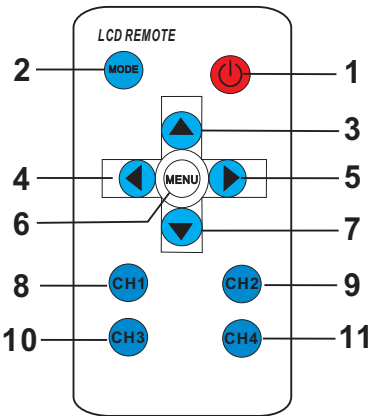

- 1.Power on/off
- 2.Channel switch
- 3.Up/Channel switch
- 4.Analog decrease
- 5.Analog increase
- 6.Menu options
- 7.Down/Ok key
- 8.CH1
- 9.CH2
- 10.CH3/CH5
- 11.CH4/CH6